

Tel:(86-21) 3755 4800 Fax:(86-21) 3755 4819

Test Report

Test Report No.: 26830486 Issue Date: 08/08/16(DD/MM/YY)

Client Information:

Supplier No. : S1719

Client Company Name : PortaPower (China) Co., Ltd

Contact Address : Flat 1003, 10/F, Hopeful factory Ctr., 10-16 Wo Shing St., Fotan, N.T.,

Hong Kong

Client Contact Person : Mr.Yu Choi

IKEA Contacts Person : Abdelhak Ayadi Sample Receive Date/Test Start Date: 01/06/16

Sample information by applicant:

Article No. : /
Article Name : /
Article Date Stamp : /

Material Producer : Portapowder (HK)Ltd

Material Description : Battery Charger

Material Batch Number/Production Date: May 2016

Test type : Verifying Test

Identification Code : C060L1001E.001



Test Method:

Pb/Cd/Hg/Cr VI Content acc. to IOS-PRG-0027

RoHS Project acc. to IOS-PRG-0027 PBB and PBDE acc. to IOS-PRG-0027

Flame retardants acc. to IOS-PRG-0027, Chlorinated paraffins, C10-C13

Tony Watson

ITTC General Manager

The test results exclusively relate to the samples under test.

The test report shall not be reproduced except in full, without the written approval of our laboratory.

Test Report No.:26830486 Page 1 of 28



Tel: (86-21) 3755 4800 Fax: (86-21) 3755 4819

Contents:	Page
Overall Evaluation	3
Bill of Materials (BOM)	3-9
Test Results and Description of Test Method	
Description of Test Method	9
(A)Restriction of Hazardous Substances Directive (RoHS)	9-14
(B) Short Chain of Chlorinated Paraffins (Alkanes C10-13,chloro, SCCP)	14-15
Annex	
(A)IKEA Specification IOS-PRG-0027: AA-224712-5	16
(B)Exemptions in RoHS Directive 2011/65/EU (29M+1C)	16-20
Exploding photo(s) (8 pages)	21-28

See details in next pages

Test Report No.:26830486 Page 2 of 28



Tel: (86-21) 3755 4800 Fax: (86-21) 3755 4819

Overall Evaluation

Restriction of Hazardous Substances Directive (RoHS): Lead (Pb), Cadmium (Cd), Mercury (Hg), Hexavalent Chromium (Cr VI), Polybromianated Biphenyls (PBB) and Polybromianated Diphenyethers (PBDE) are Met specification of IOS-PRG-0027: AA-224712-5

Based on the randomly sampled examinations performed, the test specimen <u>corresponds</u> to above specification. With regard to the parameters tested, the IKEA specification, Electrical components and products, chemical requirements, the IKEA bans and restrictions on certain chemical compounds and substances for electrical articles, including all components therein, due to national or international regulations (including the EU RoHS-directive 2011/65/EU (29M+1C))

Short Chain of Chlorinated Paraffins (Alkanes C10-13, chloro, SCCP) are Met specification of IOS-PRG-0027: AA-224712-5

Bill of Materials (BOM)

Sample	Item	Components	Components	Components	Н	mogenous	Type/Model	Color	Same Material
ID	No.	No.	Name	Manufacturer	i	Materials	of Materials	Coloi	Same Malerial
1-1					Υ	ABS+PC		Black	
1-2	1	301.10118006	Upper Casing		Υ	Label	Plastic	Transparent/ Yellow	
1-3		00			Υ	Glue	Silicone	White	
1-4					Υ	Label	Paper	White/Black	
2	2	301.10118006 00	Lower Casing		Υ	ABS+PC		Black	
3	3	306.02118012 01	LED Bracket		Υ	PC		Transparent	
4	4	304.30118002 81	Switch Cover		Υ	ABS+PC		Black	
5-1					Υ	PA66		Black	
5-2	5	210.03180000	AC Socket		Υ	Brass/ Ni-plated		Silvery	
5-3					Υ	Metal		Silvery	
6-1					Υ	Rivet	Cu-alloy	Golden	
6-2	6	234.03011100	Heating Plate		Υ	Metal Plate		Silvery	
6-3	0	00	nealing Plate		Υ	Plastic		White	
6-4					Υ	Aluminium Plate		Silvery	
7-1					Υ	Adhesive		Yellow	
7-2		024 02011000			Υ	Aluminium Plate		Silvery	
7-3	7	234.03011200	Heating Plate		Υ	Rubber		Grey	
7-4		00	riediling ridie		Υ	Rivet	Cu-alloy	Golden	
7-5						Metal Plate		Silvery	

Test Report No.:26830486 Page 3 of 28



Tel: (86-21) 3755 4800 Fax: (86-21) 3755 4819

Sample	Item	Components	Components	Components	Н	omogenous	Type/Model	Calan	C M-ti-l																												
ID	No.	No.	Name	Manufacturer	ı	Materials	of Materials	Color	Same Material																												
7-6	7	234.03011200	Heating Plate		Υ	Plastic		White																													
8-1			Glue		Υ	Glue		White																													
8-2			Plastic		Υ	Plastic		Grey																													
8-3-1						Υ	Cable	PE	Black																												
8-3-2			Wire				Υ	Cable	PVC	Green/Yellow																											
8-3-3						Υ	Wire		Silvery																												
8-4			Capacitor						Υ	Ceramic/ Metal		Blue																									
8-5			Capacitor		Υ	Ceramic/ Metal		Green																													
8-6-1					Υ	Sleeve		Black																													
8-6-2								Υ	Metal		Silvery																										
8-6-3			Fuse			Υ	Glass		Transparent																												
8-6-4			Capacitor														Υ	Metal Wire		Silvery																	
8-7-1					Υ	Sleeve		Black																													
8-7-2		001 14100111		Capacitor								Υ	Ceramic/ Metal		Blue																						
8-8-1			1 Inductor				Υ	Wire		Golden																											
8-8-2	8	001.16100111				Υ	Glue		Black																												
8-8-3		10	Inductor		Υ	Coating		Green																													
8-8-4							Υ	Magnet		Black																											
8-9-1													Υ	Case		Yellow																					
8-9-2			Capacitor										Υ	Glue		Yellow																					
8-9-3																		Υ	Filling		Silvery																
8-10-1					Υ	Sleeve		black																													
8-10-2			la alcorta a																Υ	Wire		Golden															
8-10-3			Inductor													Υ	Coating		Yellow																		
8-10-4			Y Magnet				Black																														
8-11-1				Υ	Wire		Golden																														
8-11-2			Inductor Y		Υ	Plastic		White																													
8-11-3				Υ	Glue		Black																														
8-11-4					Υ	Coating		Green																													
8-11-5					Υ	Magnet		Black																													
8-12-1			Electrolytic																-							-								Υ	Plastic Jacket		Black
8-12-2			Capacitor		Υ	Metal Shell		Silvery																													

Test Report No.:26830486 Page 4 of 28



Tel: (86-21) 3755 4800 Fax: (86-21) 3755 4819

Sample	Item	Components	Components	Components	Н	omogenous	Type/Model	Calan	C AAtiI														
ID	No.	No.	Name	Manufacturer		Materials	of Materials	Color	Same Material														
8-12-3					Υ	Paper With Electrolyte Solution		Brown															
8-12-4			Electrolytic Capacitor		Υ	Metal Piece		Grey															
8-12-5							Υ	Plastic Bottom		Black													
8-12-6					Υ	Metal Pin		Silvery															
8-13			IC											Υ	Plastic/ Metal		Black						
8-14			Resistor		Υ	Ceramic/ Metal		Multicolor/ Brown															
8-15			Capacitor		Υ	Ceramic/ Metal		Orange															
8-16			Capacitor Resistor						Υ	Ceramic/ Metal		Blue											
8-17					Resistor		Υ	Ceramic/ Metal		Multicolor/ Brown													
8-18-1					Υ	Nut	Metal	Silvery															
8-18-2	8	001.16100111					IC		Υ	Plastic/ Metal		Black											
8-19-1							10	10	10	10	Inductor			Υ	Sleeve		Black						
8-19-2			ilidocioi										Υ	Magnet		Black							
8-20			Resistor			Υ	Ceramic/ Metal		Multicolor/ Brown														
8-21			Resistor		Υ	Ceramic/		Multicolor/															
						Metal Plastic/		Grey															
8-22							Diode		Υ	Metal		Black											
8-23-1					Plastic Jacket		Black/Golden																
8-23-2					Υ	Metal Shell		Silvery															
8-23-3			Electrolytic Capacitor								,	Ŋ)					Y	I I Y I	Paper With Electrolyte Solution		Brown	
8-23-4						Metal Piece		Grey															
8-23-5					Υ	Plastic Bottom		Black															

Test Report No.:26830486 Page 5 of 28



Tel: (86-21) 3755 4800 Fax: (86-21) 3755 4819

Sample ID	Item No.	Components No.	Components Name	Components Manufacturer		omogenous Materials	Type/Model of Materials	Color	Same Material																				
8-23-6					Υ	Metal Pin		Silvery																					
8-24			IC		Υ	Plastic/ Metal		Black																					
8-25			LED				Υ	Plastic/ Metal		White																			
8-26			Resistor				Υ	Ceramic/ Metal		Multicolor/ Grey																			
8-27			Capacitor		Υ	Ceramic/ Metal		Blue																					
8-28-1			Inductor		Υ	Magnet		Black																					
8-28-2			Inductor					Υ	Metal		Silvery																		
8-29-1					Υ	Plastic Jacket		Green																					
8-29-2										Υ	Metal Shell		Silvery																
8-29-3		001.16100111 10	001.16100111	Electrolytic Capacitor						Υ	Paper With Electrolyte Solution		Brown																
8-29-4				001.16100111	001.16100111	001.16100111	Саразно.		Υ	Metal Piece		Grey																	
8-29-5	8		1		Υ	Plastic Bottom		Black																					
8-29-6					Υ	Metal Pin		Silvery																					
8-30-1						Υ	Wire		Golden																				
8-30-2			la di cata v		Υ	Glue		Black																					
8-30-3			Inductor		Y Coating Y Magnet Y Adhesive Y Plastic Y Magnet Y Metal Wire Y Cable		_	_	-	-		-		Υ	Coating		Green												
8-30-4															_		<u> </u>				Υ	Magnet		Black					
8-31-1																		Υ	Adhesive		Yellow								
8-31-2																			Υ	Plastic		Black							
8-31-3							Black																						
8-31-4			Transformer																				Υ			Golden			
8-31-5		PCB Y Cable Y Pin Y Ceramic/ Metal Y Ceramic/ Metal											PE	Transparent															
8-31-6				Υ	Pin		Silvery																						
8-32-1			РСВ		-	_				-															Υ		R26	Black	
8-32-2																													
8-32-3					Υ	Ceramic/ Metal	C5,C10,C15, C16	Brown																					

Test Report No.:26830486 Page 6 of 28



Tel: (86-21) 3755 4800 Fax: (86-21) 3755 4819

Sample ID	Item No.	Components No.	Components Name	Components Manufacturer		omogenous Materials	Type/Model of Materials	Color	Same Material																											
8-32-4					Υ	Ceramic/ Metal	C20,C21	Beige																												
8-32-5					Υ	Ceramic/ Metal	431	Black																												
8-32-6					Υ	Ceramic/ Metal	223	Black																												
8-32-7											Υ	Ceramic/ Metal	R3,R23	Black																						
8-32-8									Υ	Ceramic/ Metal	C17	Beige																								
8-32-9									Υ	Ceramic/ Metal	R25,R33	Black																								
8-32- 10								Υ	Ceramic/ Metal	R15	Black																									
8-32- 11							Υ	Ceramic/ Metal	R24,R31,R32	Black																										
8-32- 12											Υ	Ceramic/ Metal	R35	Black																						
8-32- 13															,	Υ	Plastic/ Metal		Black																	
8-32- 14	8	001.16100111	РСВ			Υ	Ceramic/ Metal	R28	Black																											
8-32- 15		10			Υ	Ceramic/ Metal	R22	Black																												
8-32- 16					Υ	Plastic/ Metal		Black																												
8-32- 17					Υ	Plastic		Black																												
8-32- 18						Υ	Metal Pin		Silvery																											
8-32- 19							Υ	Ceramic/ Metal	R17	Black																										
8-32- 20																					Υ	Ceramic/ Metal	R27	Black												
8-32- 21																								Υ	РСВ		Green									
8-32- 22																												Υ	Solder		Silvery					
8-33-1																																				
8-33-2					Υ	Plastic/ Metal		Black																												
8-33-3					Υ	Ceramic/	R18	Black																												



Tel: (86-21) 3755 4800 Fax: (86-21) 3755 4819

Sample	Item	Components	Components	Components	Н	mogenous	Type/Model	Calan	C AAtiI	
ID	No.	No.	Name	Manufacturer	1	Materials	of Materials	Color	Same Material	
						Metal				
8-33-4					Υ	Ceramic/ Metal	C8,C12	Beige		
8-33-5					Υ	Ceramic/ Metal	R13	Black		
8-33-6					Υ	Ceramic/ Metal	R6	Black		
8-33-7					Υ	Ceramic/ Metal	C19	Beige		
8-33-8						Υ	Glass/ Metal	D3,D4	Orange	
8-33-9		001.16100111					Υ	Ceramic/ Metal	R19	Black
8-33- 10	8		Control PCB		Υ	Ceramic/ Metal	R4	Black		
8-33- 11					Υ	Ceramic/ Metal	R1	Black		
8-33- 12					Υ	Plastic/ Metal		Black		
8-33- 13					Υ	Ceramic/ Metal	R14	Black		
8-33- 14					Υ	Ceramic/ Metal	R29	Black		
8-33- 15					Υ	РСВ		Green		
8-33- 16					Υ	Solder		Silvery		
9-1					Υ	End Stopper	PVC	Black		
9-2					Υ	R-sleeve		Black		
9-3					Υ	L-sleeve		Black		
9-4					Υ	Cable	PVC	Black		
9-5					Υ	Cable	PVC	White		
9-6		210.02214010			Υ	Wire		Silvery		
9-7	9	01	Export Wire		Υ	Wire		Silvery		
9-8		01		Υ	Top Sleeve	PVC	Black			
9-9				Υ	Label		Yellow/Black			
9-10				Υ	Sleeve	PVC	Black			
9-11				,	Υ	Magnet		Black		
9-12					Υ	Metal		Silvery		
9-13					Υ	Holder		Black		



Sample	Item	Components	Components	Components	Н	omogenous	Type/Model	Calan	C M-4
ID	No.	No.	Name	Manufacturer		Materials	of Materials	Color	Same Material
9-14					Υ	Metal Pin		Silvery	
10	10	601.01001210 01	Label Paper		Υ	PG/HDF		Black/White	
11	11	508.00003000 05	Rubber Foot		Υ	Silicone Rubber		Black	
12	12	405.10318292 02	Screw		Υ	1010 a Carbon Steel		Black	
13	13	405.10300272 01	Screw		Υ	1010 a Carbon Steel		Black	
14-1					Υ	Inner Plug Sleeve	PVC	Black	
14-2					Υ	Holder		Black	
14-3					Υ	Pin		Golden	
14-4					Υ	Cable	PVC	Black	
14-5					Υ	Cable	PVC	Blue	
14-6					Υ	Cable	PVC	Brown	
14-7			Plug		Υ	Cable	PVC	Yellow/Green	
14-8					Υ	Wire		Golden	
14-9					Υ	Outer Plug Sleeve	PVC	Black	
14-10					Υ	Metal Support		Silvery	
14-11					Υ	Metal Pin	Cu-alloy	Silvery	
14-12					Υ	Pin Holder		Black	

Description of Test Method

- (A) Determination of Lead (Pb), Cadmium (Cd), Mercury (Hg), Hexavalent Chromium (Cr VI), Polybromianated Biphenyls (PBB) and Polybromianated Diphenyethers (PBDE) in IEC 62321 by XRF, ICP/OES and GC/MS.
- (B) Short Chain of Chlorinated Paraffins (Alkanes C10-13,chloro, SCCP): Wet Chemical Test, Extraction and Followed by GC/MS/ECD

(A) Restriction of Hazardous Substances Directive (RoHS)

Na		XRI	F Result, m	g/kg		Chemical Confirmation Result, mg/kg							
No.	Pb	Cd	Hg	Cr	Br	Pb	Cd	Hg	Cr VI	PBB	PBDE		
1-1	BL	BL	BL	BL	BL								
1-2	BL	BL	BL	BL	BL								

Test Report No.:26830486 Page 9 of 28



		XRI	Result, m	g/kg			Chemical (Confirma	tion Result, mg/kg		
No.	Pb	Cd	Hg	Cr	Br	Pb	Cd	Hg	Cr VI	PBB	PBDE
1-3	BL	BL	BL	BL	BL						
1-4	BL	BL	BL	BL	BL						
2	BL	BL	BL	BL	BL						
3	BL	BL	BL	BL	BL						
4	BL	BL	BL	BL	Х					<10	<10
5-1	BL	BL	BL	BL	Х					<10	<10
5-2	BL	BL	BL						Negative (<0.10 µg/cm²)		
5-3	BL	BL	BL						Negative (<0.10 µg/cm²)		
6-1	BL	BL	BL								
6-2	BL	BL	BL						Negative (<0.10 µg/cm²)		
6-3	BL	BL	BL	BL	BL						
6-4	BL	BL	BL								
7-1	BL	BL	BL	BL	BL						
7-2	BL	BL	BL								
7-3	BL	BL	BL	BL	BL						
7-4	BL	BL	BL								
7-5	BL	BL	BL						Negative (<0.10 µg/cm²)		
7-6	BL	BL	BL	BL	BL						
8-1	BL	BL	BL	BL	BL						
8-2	BL	BL	BL	BL	BL						
8-3-1	BL	BL	BL	BL	BL						
8-3-2	BL	BL	BL	BL	BL						
8-3-3	BL	BL	BL								
8-4	BL	Х	BL	BL			<5				
8-5	BL	BL	BL	Х					<10		
8-6-1	BL	BL	BL	BL	BL						
8-6-2	BL	BL	BL						Negative (<0.10 µg/cm²)		
8-6-3	BL	BL	BL	BL							
8-6-4	BL	BL	BL								
8-7-1	BL	BL	BL	BL	BL						
8-7-2	BL	Х	BL	BL			<5				
8-8-1	BL	BL	BL								
8-8-2	BL	BL	BL	BL	BL						



		XRI	F Result, m	g/kg		Chemical Confirmation Result, mg/kg							
No.	Pb	Cd	Hg	Cr	Br	Pb	Cd	Hg	Cr VI	PBB	PBDE		
8-8-3	BL	BL	BL	BL	BL								
8-8-4	BL	BL	BL										
8-9-1	BL	BL	BL	BL	Х					<10	<10		
8-9-2	BL	BL	BL	BL	BL								
8-9-3	BL	BL	BL	BL	BL								
8-10-1	BL	BL	BL	BL	BL								
8-10-2	BL	BL	BL										
8-10-3	BL	BL	BL	BL	BL								
8-10-4	BL	BL	BL										
8-11-1	BL	BL	BL										
8-11-2	BL	BL	BL	BL	Х					<10	<10		
8-11-3	BL	BL	BL	BL	BL								
8-11-4	BL	BL	BL	BL	BL								
8-11-5	BL	BL	BL										
8-12-1	BL	BL	BL	BL	BL								
8-12-2	BL	BL	Х					<5					
8-12-3	BL	BL	BL	BL	BL								
8-12-4	BL	BL	BL										
8-12-5	BL	BL	BL	BL	BL								
8-12-6	BL	BL	BL										
8-13	BL	BL	BL	BL	Х					<10	<10		
8-14	BL	BL	BL	BL									
8-15	Х	BL	BL	BL		26000(2.60%)#1							
8-16	BL	BL	BL	BL									
8-17	BL	BL	BL	BL									
8-18-1	BL	BL	BL						Negative (<0.10 µg/cm²)				
8-18-2	BL	BL	BL	BL	Х					<10	<10		
8-19-1	BL	BL	BL	BL	BL								
8-19-2	BL	BL	BL				-						
8-20	BL	BL	BL	BL									
8-21	BL	BL	BL	BL			-						
8-22	BL	BL	BL	BL	Х					<10	<10		
8-23-1	BL	BL	BL	BL	BL								
8-23-2	BL	BL	Х					<5					
8-23-3	BL	BL	BL	BL	BL								
8-23-4	BL	BL	BL										



		XRI	Result, m	g/kg			Chemical (Confirma	tion Result, mg/kg		
No.	Pb	Cd	Hg	Cr	Br	Pb	Cd	Hg	Cr VI	PBB	PBDE
8-23-5	BL	BL	BL	BL	BL						
8-23-6	BL	BL	Χ					<5			
8-24	BL	BL	BL	BL	Х					<10	<10
8-25	BL	BL	BL	BL	Х					<10	<10
8-26	BL	BL	BL	BL							
8-27	BL	Х	BL	BL			<5				
8-28-1	BL	BL	BL								
8-28-2	BL	BL	BL						Negative (<0.10 µg/cm²)		
8-29-1	BL	BL	BL	BL	BL						
8-29-2	BL	BL	Χ					<5			
8-29-3	BL	BL	BL	BL	BL						
8-29-4	BL	BL	Х					<5			
8-29-5	BL	BL	BL	BL	BL						
8-29-6	BL	BL	Х					<5			
8-30-1	BL	BL	BL								
8-30-2	BL	BL	BL	BL	BL						
8-30-3	BL	BL	BL	BL	BL						
8-30-4	BL	BL	BL								
8-31-1	BL	BL	BL	BL	BL						
8-31-2	BL	BL	BL	BL	BL						
8-31-3	BL	BL	BL								
8-31-4	BL	BL	BL								
8-31-5	BL	BL	BL	BL	BL						
8-31-6	BL	BL	BL								
8-32-1	Х	Х	BL	BL		857 ^{#1}	<5				
8-32-2	Х	BL	BL	Х		476			<10		
8-32-3	BL	BL	BL	BL							
8-32-4	BL	BL	BL	BL							
8-32-5	Х	BL	BL	BL		1200(0.12%)#1					
8-32-6	Х	BL	BL	Х		912 ^{#1}			<10		
8-32-7	Х	BL	BL	Х		1500(0.15%)#1			<10		
8-32-8	BL	BL	BL	BL							
8-32-9	Х	BL	BL	Х		844#1			<10		
8-32-10	Х	BL	BL	Х		86			<10		
8-32-11	Х	Х	BL	Х		542	<5		<10		
8-32-12	Х	BL	BL	Х		960#1			<10		

Test Report No.:26830486 Page 12 of 28



	XRF Result, mg/kg				Chemical Confirmation Result, mg/kg						
No.	Pb	Cd	Hg	Cr	Br	Pb	Cd	Hg	Cr VI	PBB	PBDE
8-32-13	BL	BL	BL	BL	Х					<10	<10
8-32-14	Х	BL	BL	Х		772 ^{#1}			<10		
8-32-15	Х	BL	BL	Х		236			<10		
8-32-16	BL	BL	BL	BL	BL						
8-32-17	BL	BL	BL	BL	Х					<10	30
8-32-18	BL	BL	BL						Negative (<0.10 µg/cm²)		
8-32-19	Х	BL	BL	Х		863#1			<10		
8-32-20	Х	Х	BL	Х		973#1	<5		<10		
8-32-21	BL	BL	BL	BL	Х					<10	<10
8-32-22	BL	BL	BL								
8-33-1	Х	BL	BL	Х		1200(0.12%)#1			<10		
8-33-2	BL	BL	BL	BL	Х					<10	<10
8-33-3	Х	BL	BL	Х		927#1			<10		
8-33-4	BL	BL	BL	BL							
8-33-5	Х	BL	BL	Х		518			<10		
8-33-6	Х	Х	BL	Х		1100(0.11%)#1	<5		<10		
8-33-7	BL	BL	BL	BL							
8-33-8	Х	BL	BL	BL		110000(11%)#1					
8-33-9	Х	Х	BL	Х		288	<5		<10		
8-33-10	BL	Х	BL	Х			<5		<10		
8-33-11	Х	BL	BL	Х		814#1			<10		
8-33-12	BL	BL	BL	BL	Х					<10	<10
8-33-13	BL	BL	BL	BL							
8-33-14	Х	BL	BL	Х		1100(0.11%)#1			<10		
8-33-15	BL	BL	BL	BL	Х					<10	<10
8-33-16	BL	BL	BL								
9-1	BL	BL	BL	BL	BL						
9-2	BL	BL	BL	BL	BL						
9-3	BL	BL	BL	BL	BL						
9-4	BL	BL	BL	BL	BL						
9-5	BL	BL	BL	BL	BL		-				
9-6	BL	BL	BL								
9-7	BL	BL	BL								
9-8	BL	BL	BL	BL	BL						
9-9	BL	BL	BL	BL	BL						
9-10	BL	BL	BL	BL	BL						



N _a	XRF Result, mg/kg				Chemical Confirmation Result, mg/kg						
No.	Pb	Cd	Hg	Cr	Br	Pb	Cd	Hg	Cr VI	PBB	PBDE
9-11	BL	BL	BL								
9-12	BL	BL	BL						Negative (<0.10 µg/cm²)		
9-13	BL	BL	BL	BL	BL						
9-14	BL	BL	BL						Negative (<0.10 µg/cm²)		
10	BL	BL	BL	BL	BL						
11	BL	BL	BL	BL	BL						
12	BL	BL	BL						Negative (<0.10 µg/cm²)		
13	BL	BL	BL						Negative (<0.10 µg/cm²)		
14-1	BL	BL	BL	BL	BL						
14-2	BL	BL	BL	BL	Х					<10	<10
14-3	BL	BL	BL								
14-4	BL	BL	BL	BL	BL						
14-5	BL	BL	BL	BL	BL						
14-6	BL	BL	BL	BL	BL						
14-7	BL	BL	BL	BL	BL						
14-8	BL	BL	BL								
14-9	BL	BL	BL	BL	BL						
14-10	BL	BL	BL						Negative (<0.10 µg/cm²)		
14-11	Х	BL	BL			18000(1.80%)#2			Negative (<0.10 µg/cm²)		
14-12	BL	BL	BL	BL	Х					<10	<10

Remark:

#1: Sample "8-15", "8-32-1", "8-32-5", "8-32-6", "8-32-7", "8-32-9", "8-32-12", "8-32-14", "8-32-19", "8-32-20", "8-33-1", "8-33-3", "8-33-6", "8-33-8", "8-33-11" and "8-33-14" are exempted according to "7(c)-1" in Annex(B)

#2: Sample "14-11" is exempted according to "6(c)" in Annex (B)

(B) Short Chain of Chlorinated Paraffins (Alkanes C10-13, chloro, SCCP)

No.	Chemical Confirmation Result, mg/kg
8-3-2	<300
9-1	<300
9-4	<300
9-5	<300
9-8	<300

Test Report No.:26830486 Page 14 of 28



No.	Chemical Confirmation Result, mg/kg
9-10	<300
14-1	<300
14-4	<300
14-5	<300
14-6	<300
14-7	<300
14-9	<300

Remark:

(A) Limits of screening test by XRF for Regulated Elements in Various Materials

Materials	Pb	Cd	Hg	Cr	Br
Metal	BL≤500 <x<1500≤ol< td=""><td>BL ≤50<x<150≤ol< td=""><td>BL ≤50<x<150≤ol< td=""><td></td><td></td></x<150≤ol<></td></x<150≤ol<></td></x<1500≤ol<>	BL ≤50 <x<150≤ol< td=""><td>BL ≤50<x<150≤ol< td=""><td></td><td></td></x<150≤ol<></td></x<150≤ol<>	BL ≤50 <x<150≤ol< td=""><td></td><td></td></x<150≤ol<>		
Plastic and Other Polymeric	BL ≤150 <x<450≤ol< td=""><td>BL ≤50<x<150≤ol< td=""><td>BL ≤50<x<150≤ol< td=""><td>BL ≤500<x< td=""><td>BL ≤500<x< td=""></x<></td></x<></td></x<150≤ol<></td></x<150≤ol<></td></x<450≤ol<>	BL ≤50 <x<150≤ol< td=""><td>BL ≤50<x<150≤ol< td=""><td>BL ≤500<x< td=""><td>BL ≤500<x< td=""></x<></td></x<></td></x<150≤ol<></td></x<150≤ol<>	BL ≤50 <x<150≤ol< td=""><td>BL ≤500<x< td=""><td>BL ≤500<x< td=""></x<></td></x<></td></x<150≤ol<>	BL ≤500 <x< td=""><td>BL ≤500<x< td=""></x<></td></x<>	BL ≤500 <x< td=""></x<>
Ceramics and Glass	BL ≤500 <x<1500≤ol< td=""><td>BL ≤50<x<150≤ol< td=""><td>BL ≤50<x<150≤ol< td=""><td>BL ≤500<x< td=""><td></td></x<></td></x<150≤ol<></td></x<150≤ol<></td></x<1500≤ol<>	BL ≤50 <x<150≤ol< td=""><td>BL ≤50<x<150≤ol< td=""><td>BL ≤500<x< td=""><td></td></x<></td></x<150≤ol<></td></x<150≤ol<>	BL ≤50 <x<150≤ol< td=""><td>BL ≤500<x< td=""><td></td></x<></td></x<150≤ol<>	BL ≤500 <x< td=""><td></td></x<>	
Surface Coating	BL ≤500 <x<1500≤ol< td=""><td>BL ≤50<x<150≤ol< td=""><td>BL ≤50<x<150≤ol< td=""><td>BL ≤500<x< td=""><td>BL ≤500<x< td=""></x<></td></x<></td></x<150≤ol<></td></x<150≤ol<></td></x<1500≤ol<>	BL ≤50 <x<150≤ol< td=""><td>BL ≤50<x<150≤ol< td=""><td>BL ≤500<x< td=""><td>BL ≤500<x< td=""></x<></td></x<></td></x<150≤ol<></td></x<150≤ol<>	BL ≤50 <x<150≤ol< td=""><td>BL ≤500<x< td=""><td>BL ≤500<x< td=""></x<></td></x<></td></x<150≤ol<>	BL ≤500 <x< td=""><td>BL ≤500<x< td=""></x<></td></x<>	BL ≤500 <x< td=""></x<>
Electronic Components including PCB	BL ≤500 <x<1500≤ol< td=""><td>BL ≤50<x<150≤ol< td=""><td>BL ≤50<x<150≤ol< td=""><td>BL ≤500<x< td=""><td>BL ≤500<x< td=""></x<></td></x<></td></x<150≤ol<></td></x<150≤ol<></td></x<1500≤ol<>	BL ≤50 <x<150≤ol< td=""><td>BL ≤50<x<150≤ol< td=""><td>BL ≤500<x< td=""><td>BL ≤500<x< td=""></x<></td></x<></td></x<150≤ol<></td></x<150≤ol<>	BL ≤50 <x<150≤ol< td=""><td>BL ≤500<x< td=""><td>BL ≤500<x< td=""></x<></td></x<></td></x<150≤ol<>	BL ≤500 <x< td=""><td>BL ≤500<x< td=""></x<></td></x<>	BL ≤500 <x< td=""></x<>
Other Materials	BL ≤150 <x<450≤ol< td=""><td>BL ≤50<x<150≤ol< td=""><td>BL ≤50<x<150≤ol< td=""><td>BL ≤500<x< td=""><td>BL ≤500<x< td=""></x<></td></x<></td></x<150≤ol<></td></x<150≤ol<></td></x<450≤ol<>	BL ≤50 <x<150≤ol< td=""><td>BL ≤50<x<150≤ol< td=""><td>BL ≤500<x< td=""><td>BL ≤500<x< td=""></x<></td></x<></td></x<150≤ol<></td></x<150≤ol<>	BL ≤50 <x<150≤ol< td=""><td>BL ≤500<x< td=""><td>BL ≤500<x< td=""></x<></td></x<></td></x<150≤ol<>	BL ≤500 <x< td=""><td>BL ≤500<x< td=""></x<></td></x<>	BL ≤500 <x< td=""></x<>

(B) Wet chemistry test methods

Testing Item	Testing Method	
Pb, Cd, Cr	With Reference to IEC 62321-5:2013	
Hg	With Reference to IEC 62321-4:2013	
Cr VI (for non-metal)	With Reference to IEC 62321:2008	
Cr VI (for metal)	With Reference to IEC 62321-7-1:2015	
PBB, PBDE	With Reference to IEC 62321-6:2015	

Remark:

- (a) "Below limit" (BL) or "Over limit" (OL) determination is set at 50% less than or greater than IKEA limit, respectively.
- (b) X=Inconclusive Result, further wet chemical test is required to be performed.
- (c) "<" denotes "less than"
- (d) "---" denotes no performed items
- (e) # Limit was adjusted as below acc. to IKEA Specification IOS-PRG-0027: AA-224712-5, RoHS Directive 2011/65/EU (29M+1C), see details in Annex (B)
- (f) Negative= A negative test result indicated the concentration of Cr (VI) is less than threshold of $0.10 \,\mu g/cm2$ for boiling-water-extraction procedures by UV-VIS Spectrophotometer analysis. The sample coating is considered a non-Cr (VI) based coating.

Test Report No.:26830486 Page 15 of 28



Tel: (86-21) 3755 4800 Fax: (86-21) 3755 4819

<u>Annex</u>

(A) IKEA Specification IOS-PRG-0027: AA-224712-5

IKEA Limit, mg/kg	Pb	Cd	Hg	Cr VI	PBB, PBDE	SCCP
Metal	1000	100	100	Negative		
Ceramics and Glass	1000	100	50	1000		
Surface Coating	1000	100	50	1000	1000	
Electronic Components including Printed Circuit Board	1000	100	50	1000	1000	
Plastic and Other Polymeric	300	100	50	1000	1000	1000
Other Materials	1000	100	50	1000	1000	

(B) Exemptions in RoHS Directive 2011/65/EU (29M+1C)

	Exemption	Scope and Dates of Applicability
1	Mercury in single capped (compact) fluorescent lamps not	
	exceeding (per burner):	
1(a)	For general lighting purposes <30W: 5 mg	Expires on 31 December 2011; 3.5 mg may be used per burner after 31 December 2011 until 31 December 2012; 2.5 mg shall be used per burner after 31 December 2012
1(b)	For general lighting purposes ≥30W and <50W: 5 mg	Expires on 31 December 2011; 3.5 mg may be used per burner after 31 December 2011
1(c)	For general lighting purposes ≥50W and <150W: 5 mg	
1(d)	For general lighting purposes ≥150W: 15 mg	
1(e)	For general lighting purposes with circular or square structural shape and tube diameter ≤17mm	No limitation of use until 31 December 2011; 7mg may be used per burner after 31 December 2011
1(f)	For special purposes: 5 mg	
1(g)	For general lighting purposes < 30 W with a lifetime equal or above 20 000 h: 3,5 mg	Expires on 31 December 2017
2(a)	Mercury in double-capped linear fluorescent lamps for general lighting purposes not exceeding (per lamp):	
2(a)(1)	Tri-band phosphor with normal lifetime and a tube diameter <9mm (e.g. T2): 5 mg	Expires on 31 December 2011; 4 mg may be used per lamp after 31 December 2011
2(a)(2)	Tri-band phosphor with normal lifetime and a tube diameter ≥ 9mm and ≤17mm (e.g. T5): 5 mg	Expires on 31 December 2011; 3 mg may be used per lamp after 31 December 2011
2(a)(3)	Tri-band phosphor with normal lifetime and a tube diameter >17mm and ≤28mm (e.g. T8): 5 mg	Expires on 31 December 2011; 3.5 mg may be used per lamp after 31 December 2011
2(a)(4)	Tri-band phosphor with normal lifetime and a tube diameter >28mm (e.g. T12): 5 mg	Expires on 31 December 2012; 3.5 mg may be used per lamp after 31 December 2012
2(a)(5)	Tri-band phosphor with long lifetime (≥25000h): 8 mg	Expires on 31 December 2011; 5 mg may be used per lamp after 31 December 2011
2(b)	Mercury in other fluorescent lamps not exceeding (per lamp):	

Test Report No.:26830486 Page 16 of 28



Tel: (86-21) 3755 4800 Fax: (86-21) 3755 4819

	Exemption	Scope and Dates of Applicability
2(b)(1)	Linear halophosphate lamps with tube >28mm (e.g. T10 and T12): 10 mg	Expires on 13 April 2012
2(b)(2)	Non-linear halophosphate lamps (all diameters): 15 mg	Expires on 13 April 2016
2(b)(3)	Non-linear tri-band phosphor lamps with tube diameter >17mm (e.g. T9)	No limitation of use until 31 December 2011; 15 mg may be used per lamp after 31 December 2011
2(b)(4)	Lamps for other general lighting and special purposes (e.g. induction lamps)	No limitation of use until 31 December 2011; 15 mg may be used per lamp after 31 December 2011
3	Mercury in cold cathode fluorescent lamps and external electrode fluorescent lamps (CCFL and EEFL) for special purposes not exceeding (per lamp):	
3(a)	Short length (≤500mm)	No limitation of use until 31 December 2011; 3.5 mg may be used per lamp after 31 December 2011
3(b)	Medium length (>500mm and ≤1500mm)	No limitation of use until 31 December 2011; 5 mg may be used per lamp after 31 December 2011
3(c)	Long length (>1500mm)	No limitation of use until 31 December 2011; 13 mg may be used per lamp after 31 December 2011
4(a)	Mercury in other low pressure discharge lamps (per lamp)	No limitation of use until 31 December 2011; 15 mg may be used per lamp after 31 December 2011
4(b)	Mercury in High Pressure Sodium (vapour) lamps for general lighting purposes not exceeding (per burner) in lamps with improved color rendering index Ra>60:	
4(b)-l	P≤155W	No limitation of use until 31 December 2011; 30 mg may be used per burner after 31 December 2011
4(b)-II	155W <p≤405w< td=""><td>No limitation of use until 31 December 2011; 40 mg may be used per burner after 31 December 2011</td></p≤405w<>	No limitation of use until 31 December 2011; 40 mg may be used per burner after 31 December 2011
4(b)-III	P > 405 W	No limitation of use until 31 December 2011; 40 mg may be used per burner after 31 December 2011
4(c)	Mercury in other High Pressure Sodium (vapour) lamps for general lighting purposes not exceeding (per burner):	
4(c)-l	P≤155W	No limitation of use until 31 December 2011; 25 mg may be used per burner after 31 December 2011
4(c)-II	155W <p≤405w< td=""><td>No limitation of use until 31 December 2011; 30 mg may be used per burner after 31 December 2011</td></p≤405w<>	No limitation of use until 31 December 2011; 30 mg may be used per burner after 31 December 2011



	Exemption	Scope and Dates of Applicability
4(c)-III	P>405W	No limitation of use until 31 December 2011; 40 mg may be used per burner after 31 December 2011
4(d)	Mercury in High Pressure Mercury (vapour) lamps (HPMV)	Expires on 13 April 2015
4(e)	Mercury in metal halide lamps (MH)	
4(f)	Mercury in other discharge lamps for special purposes not specifically mentioned in this Annex	
4(g)	Mercury in hand crafted luminous discharge tubes used for signs, decorative or architectural and specialist lighting and lightartwork, where the mercury content shall be limited as follows: (a) 20 mg per electrode pair + 0,3 mg per tube length in cm, but not more than 80 mg, for outdoor applications and indoor applications exposed to temperatures below 20 °C; (b) 15 mg per electrode pair + 0,24 mg per tube length in cm, but not more than 80 mg, for all other indoor applications.	Expires on 31 December 2018
5(a)	Lead in glass of cathode ray tubes	
5(b)	Lead in glass of fluorescent tubes not exceeding 0.2% by weight	
6(a)	Lead as an alloying element in steel for machining purposes and in galvanized steel containing up to 0.35% lead by weight	
6(b)	Lead as an alloying element in aluminum containing up to 0.4% lead by weight	
6(c)	Copper alloy containing up to 4% lead by weight	
7(a)	Lead in high melting temperature type solders (i.e. lead-based alloys containing 85% by weight or more lead)	
7(b)	Lead in solders for servers, storage and storage array systems, network infrastructure equipment for switching, ignaling, transmission, and network management for telecommunications	
7(c)-l	Electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic in capacitors, e.g. piezoelectronic devices, or in a glass or ceramic matrix compound	
7(c)-II	Lead in dielectric ceramic in capacitors for a rated voltage of 125V AC or 250V DC or higher	
7(c)-III	Lead in dielectric ceramic in capacitors for a rated voltage of less than 125V AC or 250V DC	Expires on 1 January 2013 and after that date may be used in spare parts for EEE placed on the market before 1 January 2013
7(c)IV	Lead in PZT based dielectric ceramic materials for capacitors which are part of integrated circuits or discrete semiconductors	Expires on 21 July 2016
8(a)	Cadmium and its compounds in one shot pellet type thermal cut- offs	Expires on 1 January 2012 and after that date may be used in spare parts for EEE placed on the market before 1 January 2012
8(b)	Cadmium and its compounds in electrical contacts	

Test Report No.:26830486 Page 18 of 28



Tel: (86-21) 3755 4800 Fax: (86-21) 3755 4819

	Exemption	Scope and Dates of Applicability
9	Hexavalent chromium as an anticorrosion agent of the carbon steel cooling system in absorption refrigerators up to 0.75% by weight in the cooling solution	
9(b)	Lead in bearing shells and bushes for refrigerant-containing compressors for heating, ventilation, air conditioning and refrigeration (HVACR) applications	
11(a)	Lead used in C-press compliant pin connector systems	May be used in spare parts for EEE placed on the market before 24 September 2010
11(b)	Lead used in other than C-press compliant pin connector systems	Expires on 1 January 2013 and after that date may be used in spare parts for EEE placed on the market before 1 January 2013
12	Lead as a coating material for the thermal conduction module C-ring	May be used in spare parts for EEE placed on the market before 24 September 2010
13(a)	Lead in white glasses used for optical applications	
13(b)	Cadmium and lead in filter glasses and glasses used for reflectance standards	
14	Lead in solders consisting of more than two elements for the connection between the pins and the package of microprocessors with a lead content of more than 80 % and less than 85% by weight	Expired on 1 January 2011 and after that date may be used in spare parts for EEE placed on the market before 1 January 2011
15	Lead in solders to complete a viable electrical connection between semiconductor die and carrier within integrated circuit flip chip packages	
16	Lead in linear incandescent lamps with silicate coated tubes	Expires on 1 September 2013
17	Lead halide as radiant agent in high intensity discharge (HID) lamps used for professional reprography applications	
18(a)	Lead as activator in the fluorescent powder (1% lead by weight or less) of discharge lamps when used as speciality lamps for diazoprinting reprography, lithography, insect traps, photochemical and curing processes containing phosphors such as SMS ((Sr,Ba) ₂ MgSi ₂ O ₇ :Pb)	Expired on 1 January 2011
18(b)	Lead as activator in the fluorescent powder (1% lead by weight or less) of discharge lamps when used as sun tanning lamps containing phosphors such as BSP (BaSi ₂ O ₅ :Pb)	
19	Lead with PbBiSn-Hg and PbInSn-Hg in specific compositions as main amalgam and with PbSn-Hg as auxiliary amalgam in very compact energy saving lamps (ESL)	Expires on 1 June 2011
20	Lead oxide in glass used for bonding front and rear substrates of flat fluorescent lamps used for Liquid Crystal Displays (LCDs)	Expires on 1 June 2011
21	Lead and cadmium in printing inks for the application of enamels on glasses, such as borosilicate and soda lime glasses	
23	Lead in finishes of fine pitch components other than connectors with a pitch of 0.65 mm and less	May be used in spare parts for EEE placed on the market before 24 September 2010

Test Report No.:26830486 Page 19 of 28



Tel: (86-21) 3755 4800 Fax: (86-21) 3755 4819


	Exemption	Scope and Dates of Applicability
0.4	Lead in solders for the soldering to machined through hole	
24	discoidal and planar array ceramic multilayer capacitors	
25	Lead oxide in surface conduction electron emitter displays (SED)	
23	used in structural elements, notably in the seal frit and frit ring	
26	Lead oxide in the glass envelope of black light blue lamps	Expires on 1 June 2011
	Lead alloys as solder for transducers used in high-powered	
27	(designated to operate for several hours at acoustic power levels	Expired on 24 September 2010
	of 125Db SPL and above) loudspeakers	
29	Lead bound in crystal glass as defined in Annex I (Categories	
	1, 2, 3 and 4) of Council Directive 69/493/EEC (1)	
	Cadmium alloys as electrical/mechanical solder joints to	
30	electrical conductors located directly on the voice coil in	
	transducers used in high-powered loudspeakers with sound	
	pressure levels of 100Db (A) and more	
	Lead in soldering materials in mercury free flat fluorescent lamps	
31	(which, e.g. are used for liquid crystal displays, design or	
	industrial lighting)	
32	Lead oxide in seal frit used for making window assemblies for	
	Argon and Krypton laser tubes	
33	Lead in solders for the soldering of thin copper wires of	
	100µm diameter and less in power transformers	
34	Lead in cermet-based trimmer potentiometer elements	
36	Mercury used as a cathode sputtering inhibitor in DC plasma	Expires on 1 July 2010
	displays with a content up to 30 mg per display	2.,p.: 65 61. 1 65.,y 26 1.6
37	Lead in the plating layer of high voltage diodes on the basis of a	
<u> </u>	zinc borate glass body	
38	Cadmium and cadmium oxide in thick film pastes used on	
	aluminum bonded beryllium oxide	
	Cadmium in color converting II-VI LEDs (<10µg Cd per mm² of	
39	light-emitting area) for use in solid state illumination or display	Expires on 1 July 2014
	systems	
40	Cadmium in photoresistors for analogue optocouplers applied in	Expires on 31 December 2013
	professional audio equipment	•
	Lead in solders and termination finishes of electrical and	
	electronic components and finishes of printed circuit boards used	
41	in ignition modules and other electrical and electronic engine	5
41	control systems, which for technical reasons must be mounted	Expires on 31 December 2018
	directly on or in the crankcase or cylinder of hand-held	
	combustion engines (classes SH:1, SH:2, SH:3 of Directive	
	97/68/EC of the European Parliament and of the Council (2))	

Test Report No.:26830486 Page 20 of 28




Exploding Photos

Note: Sample Identifications and Photos

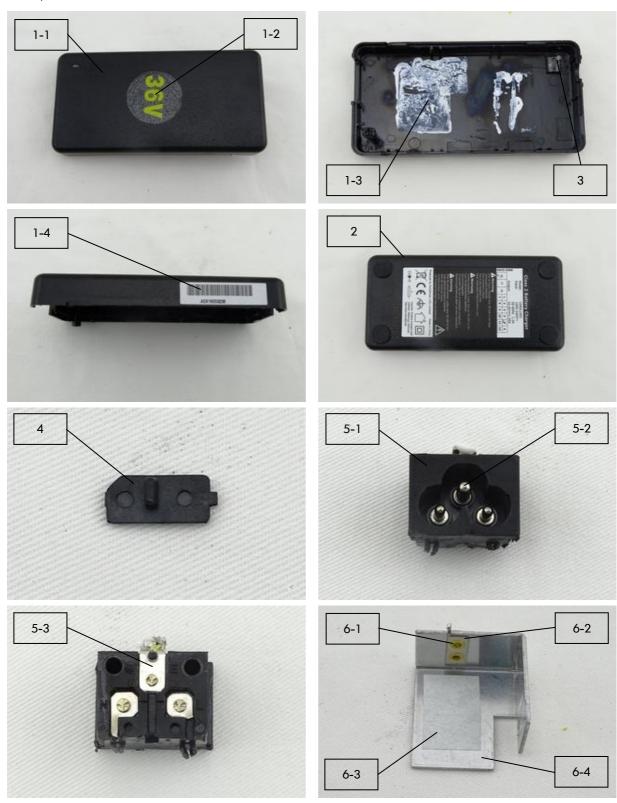




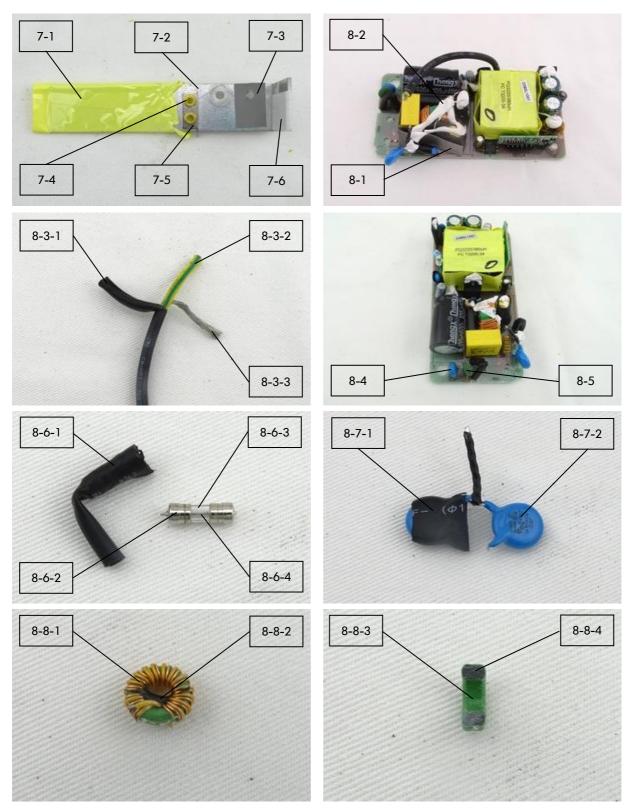

Test Report No.:26830486 Page 22 of 28




No.399, Gangwen Road, Fengxian District Shanghai, China 201413 Tel: (86-21) 3755 4800 Fax: (86-21) 3755 4819

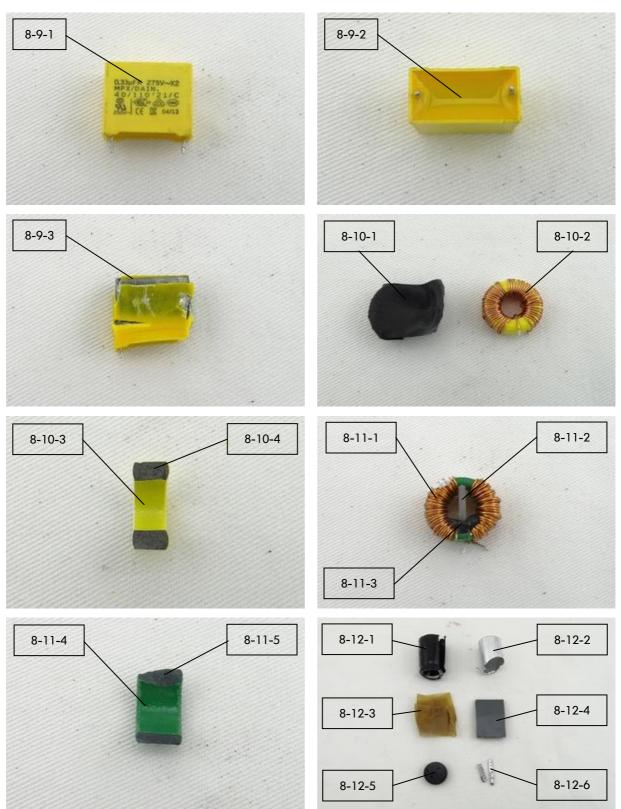




No.399, Gangwen Road, Fengxian District Shanghai, China 201413 Tel: (86-21) 3755 4800 Fax: (86-21) 3755 4819

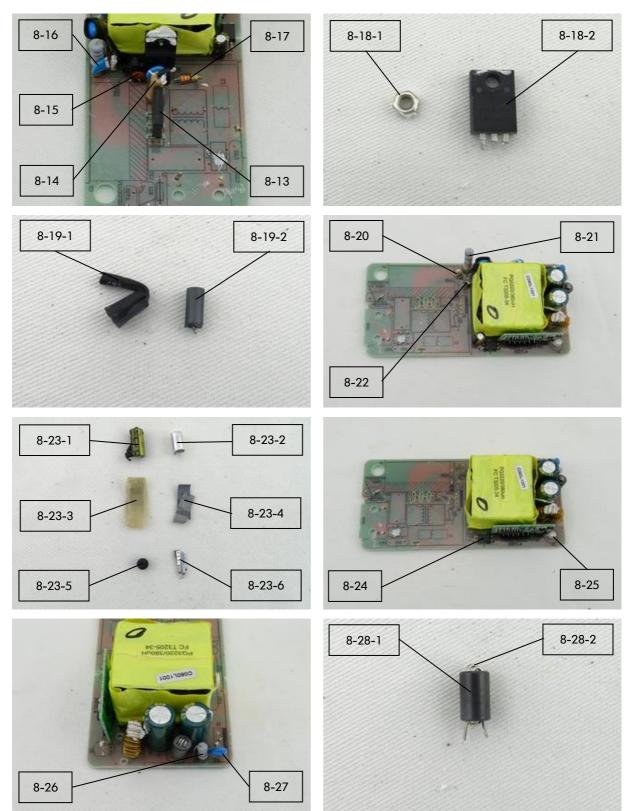

Test Report No.:26830486 Page 24 of 28




No.399, Gangwen Road, Fengxian District Shanghai, China 201413 Tel: (86-21) 3755 4800 Fax: (86-21) 3755 4819

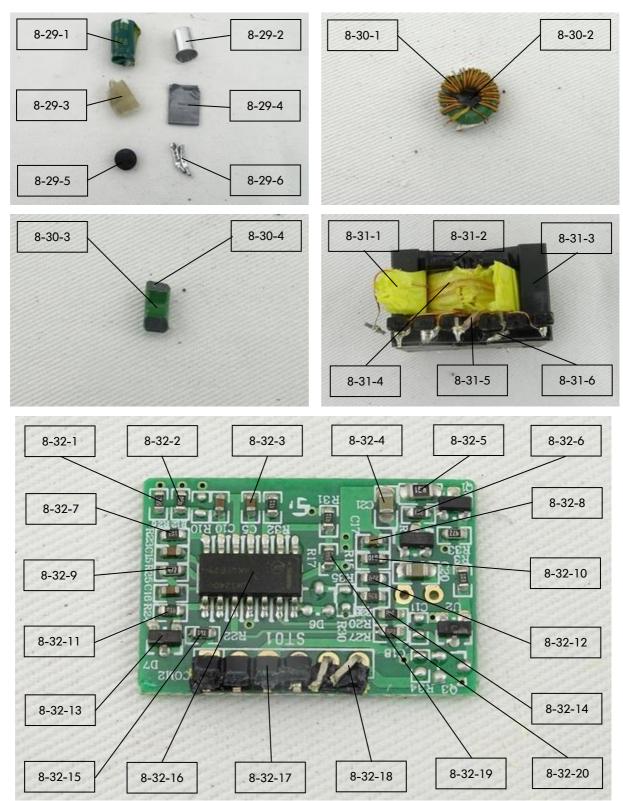

Test Report No.:26830486 Page 25 of 28



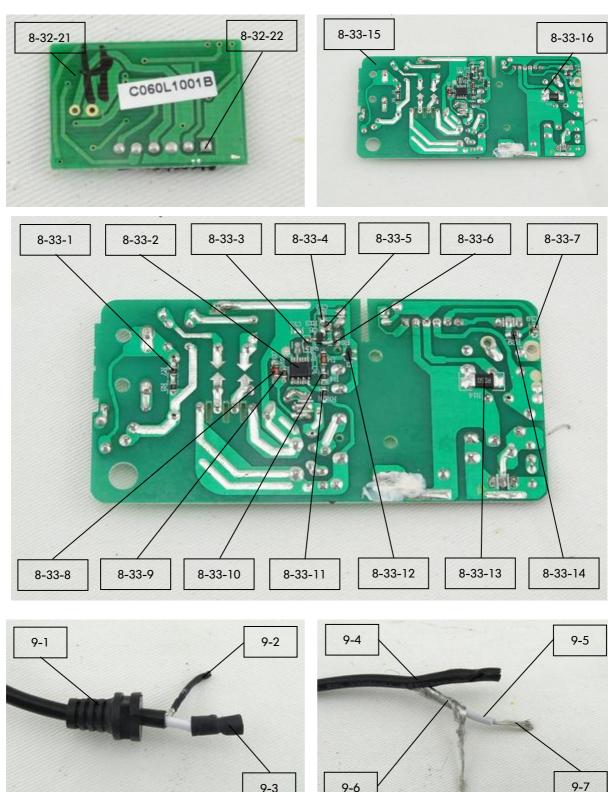


9-3


9-6





No.399, Gangwen Road, Fengxian District Shanghai, China 201413 Tel: (86-21) 3755 4800 Fax: (86-21) 3755 4819

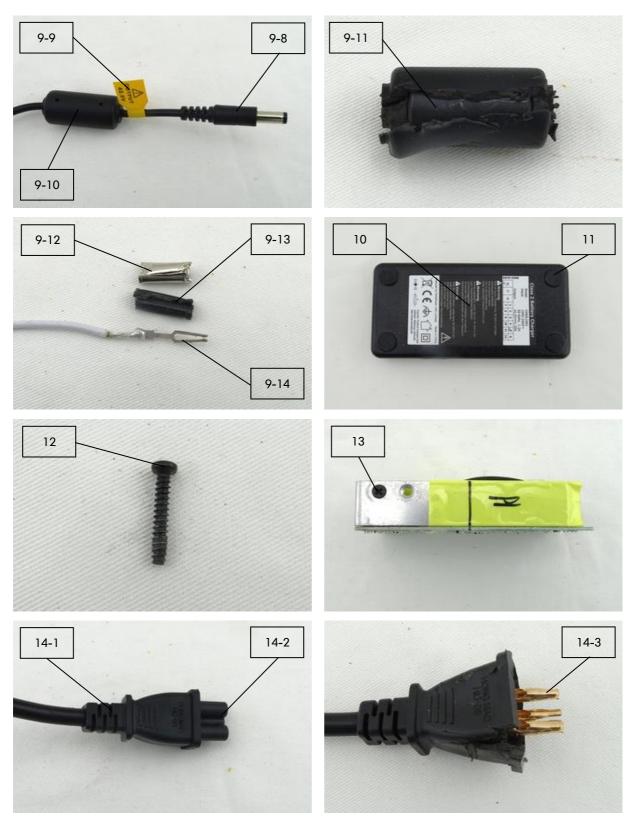



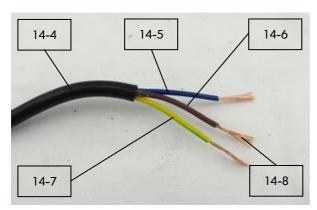

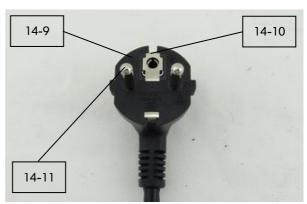

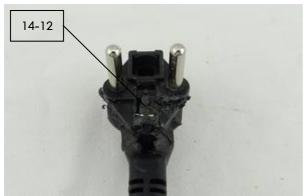

-----End of Report-----

Test Report No.:26830486 Page 28 of 28